



15.4" Wide Screen Chassis LED Monitor, 1280 x 800, 200 cd/m², 1x VGA

optional: resistive touch, capacitive touch, saw touch, infrared touch, protected glass

Winsonic

Schnittstelle Rückseite

VGA	1
Audio Out	1

Audio

Lautsprecher	2x 2W
--------------	-------

Betriebsbedingungen

Breite	383 mm
Höhe	259 mm
Tiefe	59 mm
Gewicht	6 kg
min. Betriebstemperatur	0 °C
max. Betriebstemperatur	50 °C
Eingangsspannung	AC 90 - 260 V
Stromverbrauch	28 W
Zertifikate	FCC, CE
Feuchtigkeit	10 ~ 90% (non-condensing)


Display

Zoll	15.4 "
Auflösung Breite	1280
Auflösung Höhe	800
Lumen	200 cd / m ²
Hintergrundbeleuchtung	LED
MT BF	35000 h ²
Farben	262000
Kontrast	400 : 1

Mounting

VESA 75	x
---------	---

Technische Zeichnungen

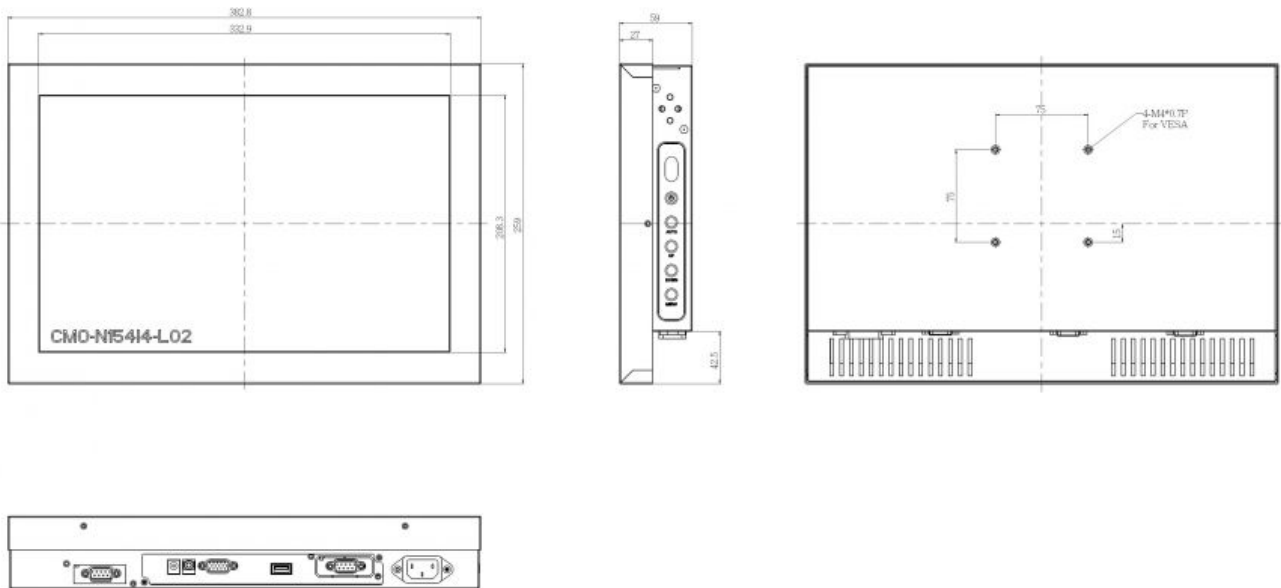

Zubehör

1x DVI

optional 1x DVI

1x DVI + 1x HDMI

optional: 1x DVI + 1x HDMI

1x DVI + AV + Looping

optional: 1x DVI + AV + Looping

24V DC-IN

optional: 24V DC-IN

Anti Reflektion Glas / Anti-Reflection Glas 3mm

optional: Anti Reflektion Glass 3mm

Anti Reflektion Glas / Anti-Reflection Glas 6mm (Anti-Vandalismus / Anti-Vandalism)

optional: Anti Reflektion Glass 6mm (Anti-Vandalismus)

Auflösung / Resolution: max. 720p

optional: Auflösung/Resolution: max. 720p

AV + Looping

optional: AV + Looping

Color Graphics Adapter

optional: Color Graphics Adapter

Externe / External OSD - Box

optional: Externe OSD - Box

HD-SDI (High Definition Serial Digital Interface) Receiver

optional: HD-SDI (High Definition Serial Digital Interface) Receiver

HD-SDI (High Definition Serial Digital Interface) Receiver + Looping

optional: HD-SDI (High Definition Serial Digital Interface) Receiver + Looping

Kapazitiver Touch / Capacitive Touch

optional: Kapazitiver Touch / Capacitive Touch

LED - Backlight - 1000cd/m²

optional: LED - Backlight - 1000cd/m²

LED - Backlight - 700cd/m²

optional: LED - Backlight - 700cd/m²

Light Sensor

optional: Light Sensor

Motion Sensor

optional: Motion Sensor

Networking Digital Signage 480p

optional: Networking Digital Signage 480p

Networking Digital Signage 720p/1080p

optional: Networking Digital Signage 720p/1080p

Resistiver Touch / Resestive Touch

optional: Resistiver Touch / Resestive Touch

RS-232 Remote Control F2482

optional: RS-232 Remote Control, only for F2482

RS-232 Remote Control SE98X

optional: RS-232 Remote Control, only for SE98X

SV + AV

optional: SV + AV

1x DVI + SV + AV

optional: SV+ AV + 1x DVI
