


EEV-EX11

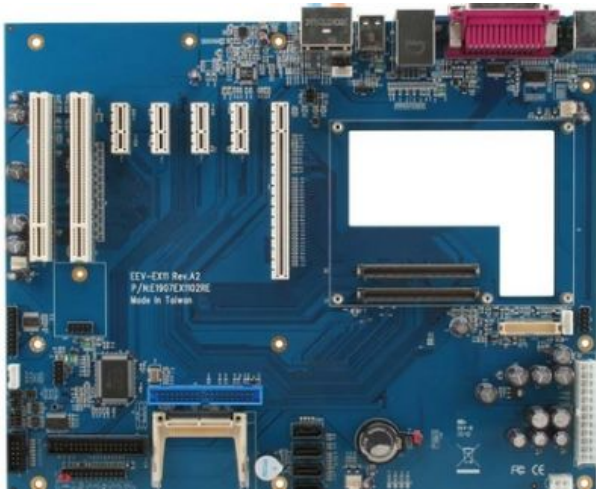

ATX COM Express Carrier Board, accepts Avalue's & other compatible COM Express CPU Module, VGA, LVDS, Audio Interface, 1x CF, 2x PCI, 4x PCIe x1, 1 PCIe x16, 4x SATA, 2x COM, 8x USB, 16-bit GPIO

Avalue

System

Festplatte	One CompactFlash Type I/II socket
------------	-----------------------------------

Schnittstelle Rückseite

USB	4
RS 232/422/485	1
Parallel	1
PS/2	2
VGA	1
Audio Mic In	1
Audio In	1
Audio Out	1
RJ45	1

Onboard Schnittstellen

USB	4
RS 232	1
LVDS Kanal	1
IDE	1
SATA	4
CompactFlash Sockel	1

Slots

PCI Express x1	4
PCI Express x16	1
PCI	2

Audio

Chipsatz	Realtek® - ALC883
----------	-------------------

Betriebsbedingungen

Breite	305 mm
Tiefe	240 mm
Gewicht	1 kg
min. Betriebstemperatur	0 °C
max. Betriebstemperatur	60 °C
Feuchtigkeit	0 ~ 90% relative humidity, non-condensing