


# HS-770EDXG2

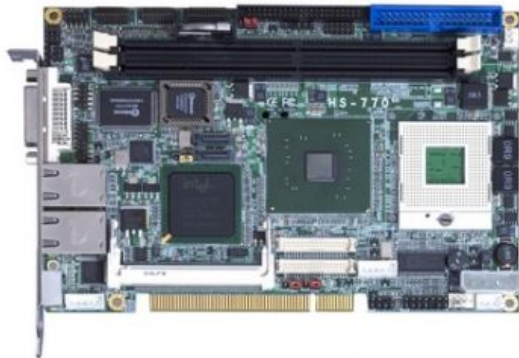

Half-Size PCI Intel Pentium M / Celeron M with 400/533 FSB Intel 915GME & ICH6M , Onboard VGA & DVI .Dual Giga LAN.Support 24-bit LVDS , CompactFlash socket , USB 2.0.RS232 & RS232/422/485 ports

[Commell](#)

## System

CPU Socket	Intel® - PGA478MN
CPU	Intel® - Pentium® Intel® - Celeron®
Chipsatz	Intel® - 915GM + ICH6M
Watchdogtimer	1~255 levels reset
Netzwerk Chipsatz	Marvell® - 88E8053
max. Netzwerkgeschwindigkeit 1000 Mbit	

## Schnittstelle Rückseite

PS/2	1
DVI	1
RJ45	2

## Onboard Schnittstellen

USB	2
RS 232	3
RS 232/422/485	1
Parallel	1
DVI	1
LVDS in bit	24
Audio Mic In	1
Audio In	1
Audio Out	1
IDE	1
SATA	2
CompactFlash Sockel	1

## Audio

Chipsatz	Realtek® - ALC201A
----------	--------------------

## Betriebsbedingungen

Breite	185 mm
Höhe	121 mm
min. Betriebstemperatur	0 °C
max. Betriebstemperatur	60 °C
Eingangsspannung	DC input 12V, 5Vstandby, +5 V


## Grafik

Chipsatz	Intel® 915GM integrated GMA (Graphic Media Accelerator) 900 Technology
----------	--

## Slots

mini PCI	1
----------	---

Mechanical Drawing

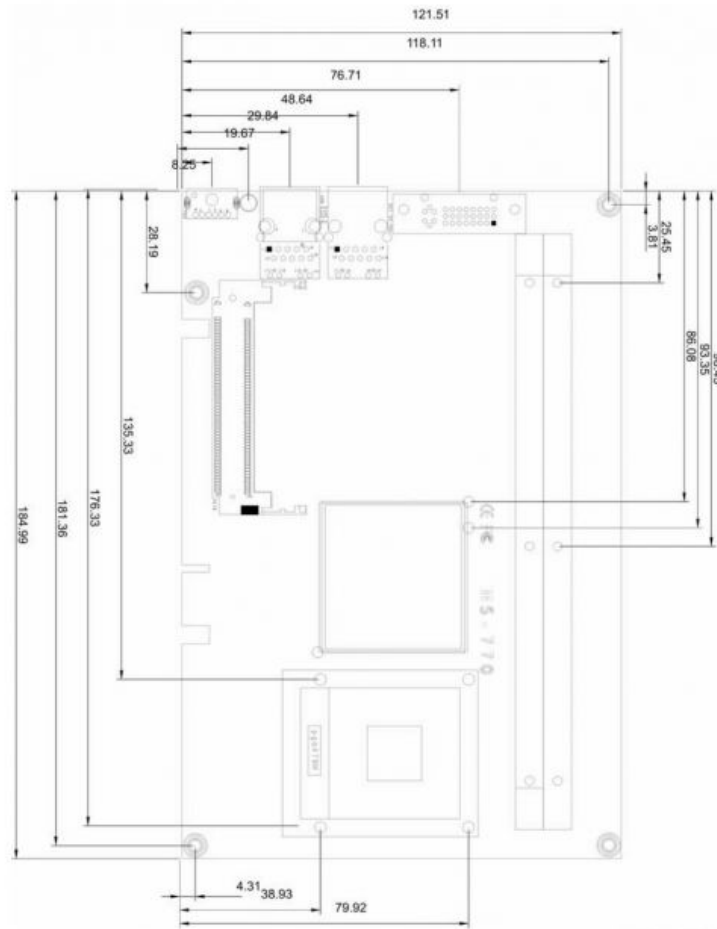

unit : inch