


IMB-1222

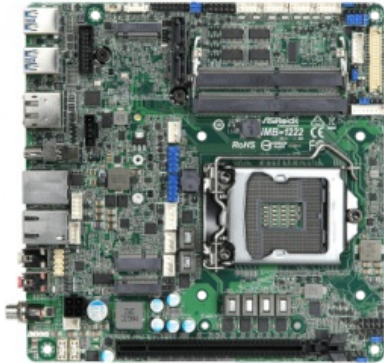

Low Profile Mini-ITX Motherboard, Intel® 10th Gen (Comet lake-S) Core™ Processor with Q470E chipset, 2x DDR4 (2933MHz, max.64GB), 2x DP 1.2, 1x LVDS or eDP, 1x HDMI 2.0a(Unterstützt TripleView), 1x PCIe x16, 6x USB3.2, 4x USB 2.0, 1x M.2 Key E, 1x M.2 Key M, 1x M.2 Key B, 4x COM, 2x SATA A3, 1x Gigabit LAN, 1x 2.5 Gigabit LAN, TPM 2.0, DC-in 12V

ASRock

System

CPU Sockel	Intel® - LGA1200
Chipsatz	Intel® - Q470E
Arbeitsspeichertyp	DDR4
max. Arbeitsspeicher in GB	64GB GB
max. Netzwerkgeschwindigkeit	2500 Mbit

Schnittstelle Vorderseite

USB	4
HDMI	1
Display Port	2
Audio Mic In	1
Audio Out	1
RJ45	2

Onboard Schnittstellen

USB	6
RS 232	4
RS 232/422/485	2
LVDS in bit	24
LVDS Kanal	2
Digital IO	8
SATA	2

Slots

PCI Express x16	1
M.2	3

Betriebsbedingungen

Breite	170 mm
Tiefe	170 mm
min. Betriebstemperatur	0 °C
max. Betriebstemperatur	60 °C