

OF1505



15" Open Frame LED Monitor, 1024 x 768, 250 cd/m², 1x VGA

optional: resistive touch, capacitive touch, saw touch, infrared touch, protected glass

Winsonic

Schnittstelle Rückseite

VGA	1
Audio Out	1

Audio

Lautsprecher	2x 2W
--------------	-------

Betriebsbedingungen

Breite	345 mm
Höhe	299 mm
Tiefe	58 mm
Gewicht	5 kg
min. Betriebstemperatur	0 °C
max. Betriebstemperatur	50 °C
Eingangsspannung	AC 90 - 260 V
Stromverbrauch	20 W
Zertifikate	FCC, CE
Feuchtigkeit	10 ~ 90% (non-condensing)

Display


Zoll	15 "
Auflösung Breite	1024
Auflösung Höhe	768
Lumen	250 cd / m ²
Hintergrundbeleuchtung	LED
MTBF	35000 h ²
Farben	16200000
Kontrast	700 : 1

Mounting

VESA 75

x

Technische Zeichnungen

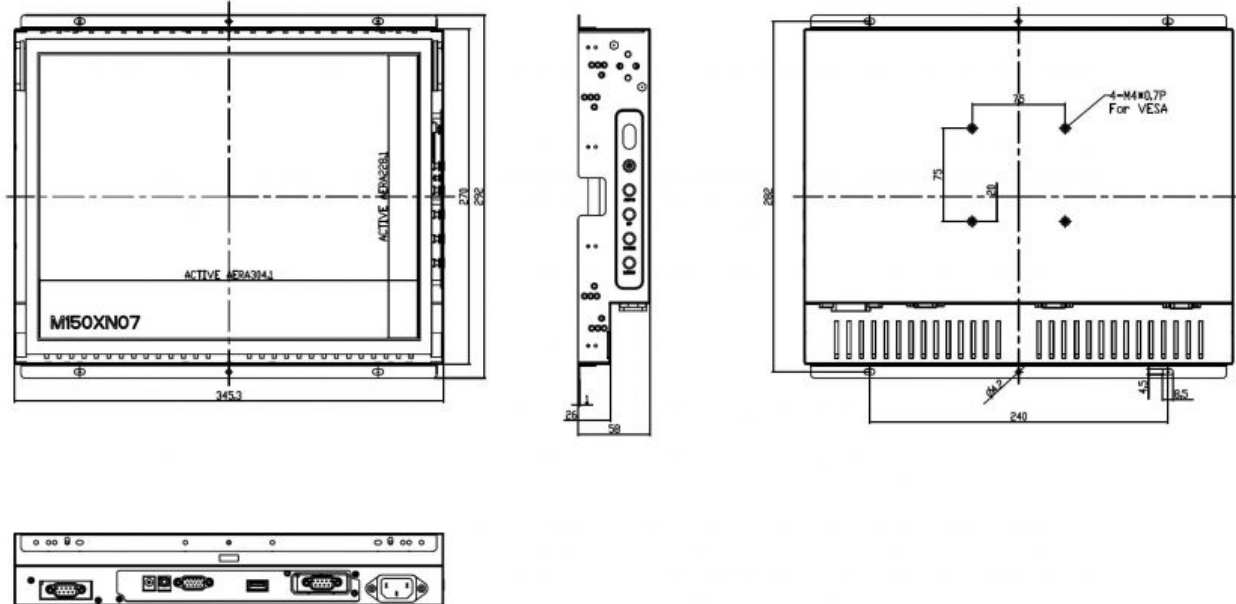

Zubehör

1x DVI

optional 1x DVI

AV + Looping

optional: AV + Looping

Auflösung / Resolution: max. 720p

optional: Auflösung/Resolution: max. 720p

Anti Reflektion Glas / Anti-Reflection Glas 8mm (Anti-Vandalismus / Anti-Vandalism)

optional: Anti Reflektion Glas / Anti-Reflection Glas 8mm (Anti-Vandalismus / Anti-Vandalism)

Anti Reflektion Glas / Anti-Reflection Glas 6mm (Anti-Vandalismus / Anti-Vandalism)

optional: Anti Reflektion Glass 6mm (Anti-Vandalismus)

Anti Reflektion Glas / Anti-Reflection Glas 3mm

optional: Anti Reflektion Glass 3mm

24V DC-IN

optional: 24V DC-IN

1x DVI + AV + Looping

optional: 1x DVI + AV + Looping

1x DVI + 1x HDMI

optional: 1x DVI + 1x HDMI

Blickschutz Filter / Look Protection Filter

optional: Blickschutz Filter / Look Protection Filter

Color Graphics Adapter

optional: Color Graphics Adapter

1x DVI + SV + AV

optional: SV+ AV + 1x DVI

Kapazitiver Touch / Capacitive Touch 6mm (Anti-Vandalismus / Anti-Vandalism)

optional: Kapazitiver Touch / Capacitive Touch 6mm (Anti-Vandalismus / Anti-Vandalism)

Kapazitiver Touch / Capacitive Touch (3M)

optional: Kapazitiver Touch / Capacitive Touch (3M)

Kapazitiver Touch / Capacitive Touch

optional: Kapazitiver Touch / Capacitive Touch

HD-SDI (High Definition Serial Digital Interface) Receiver + Looping

optional: HD-SDI (High Definition Serial Digital Interface) Receiver + Looping

HD-SDI (High Definition Serial Digital Interface) Receiver

optional: HD-SDI (High Definition Serial Digital Interface) Receiver

Externe / External OSD - Box

optional: Externe OSD - Box

LED - Backlight - 1500cd/m²

optional: LED - Backlight - 1500cd/m²

LED - Backlight - 1000cd/m²

optional: LED - Backlight - 1000cd/m²

Projizierter Kapazitiver Touch / Projected Capacitive Touch (Zytonic) MOQ 10

optional: Projizierter Kapazitiver Touch / Projected Capacitive Touch (Zytonic) MOQ 10

Projizierter Kapazitiver Touch / Projected Capacitive Touch

optional: Projizierter Kapazitiver Touch / Projected Capacitive Touch

OEM Infrarot / Infrared Multitouch

optional: OEM Infrarot Multitouch

Networking Digital Signage 720p/1080p

optional: Networking Digital Signage 720p/1080p

Networking Digital Signage 480p

optional: Networking Digital Signage 480p

Motion Sensor

optional: Motion Sensor

Light Sensor

optional: Light Sensor

LED Backlight - 450 cd/m²

optional: LED Backlight - 450 cd/m²

Projizierter Kapazitiver Touch / Projected Capacitive Touch 6mm (Anti Vandalism)

optional: Projizierter Kapazitiver Touch 6mm (Anti Vandalismus) / Projected Capacitive Touch 6mm (Anti Vandalism)

Resistiver Touch / Resestive Touch

optional: Resistiver Touch / Resestive Touch

LED - Backlight - 700cd/m²

optional: LED - Backlight - 700cd/m²

SV + AV

optional: SV + AV

SAW Touch 6mm Anti-Vandalismus / Anti-Vandalism

optional: SAW Touch 6mm Anti-Vandalismus / Anti-Vandalism

SAW Touch 10mm Anti-Vandalismus / Anti-Vandalism

optional: SAW Touch 10mm Anti-Vandalismus / Anti-Vandalism

SAW Touch (ELO)

optional: SAW Touch (ELO)

SAW Touch

optional: SAW Touch

RS-232 Remote Control SE98X

optional: RS-232 Remote Control, only for SE98X

RS-232 Remote Control F2482

optional: RS-232 Remote Control, only for F2482

LED Backlight - 350 cd/m²

LED Backlight - 350 cd/m²

Resistiver Touch (ELO) / Resestive Touch (ELO)

optional: Resistiver Touch (ELO) / Resestive Touch (ELO)
