



20.1" Open Frame LED Monitor, 1600 x 1200,
400 cd/m², 1x VGA

optional: resistive touch, capacitive touch, saw
touch, infrared touch, protected glass

Winsonic

Schnittstelle Rückseite

VGA 1

Audio Out 1

Audio

Lautsprecher 2x 2W

Betriebsbedingungen

Breite 462 mm

Höhe 384 mm

Tiefe 70 mm

Gewicht 10 kg

min. Betriebstemperatur 0 °C

max. Betriebstemperatur 50 °C

Eingangsspannung AC 90 - 260 V

Stromverbrauch 40 W

Zertifikate FCC, CE

Feuchtigkeit 10 ~ 90% (non-condensing)


Display

Zoll	20 "
Auflösung Breite	1600
Auflösung Höhe	1200
Lumen	400 cd / m ²
Hintergrundbeleuchtung	LED
MTBF	35000 h ²
Farben	16700000
Kontrast	800 : 1

Mounting

VESA 75	x
---------	---

Technische Zeichnungen

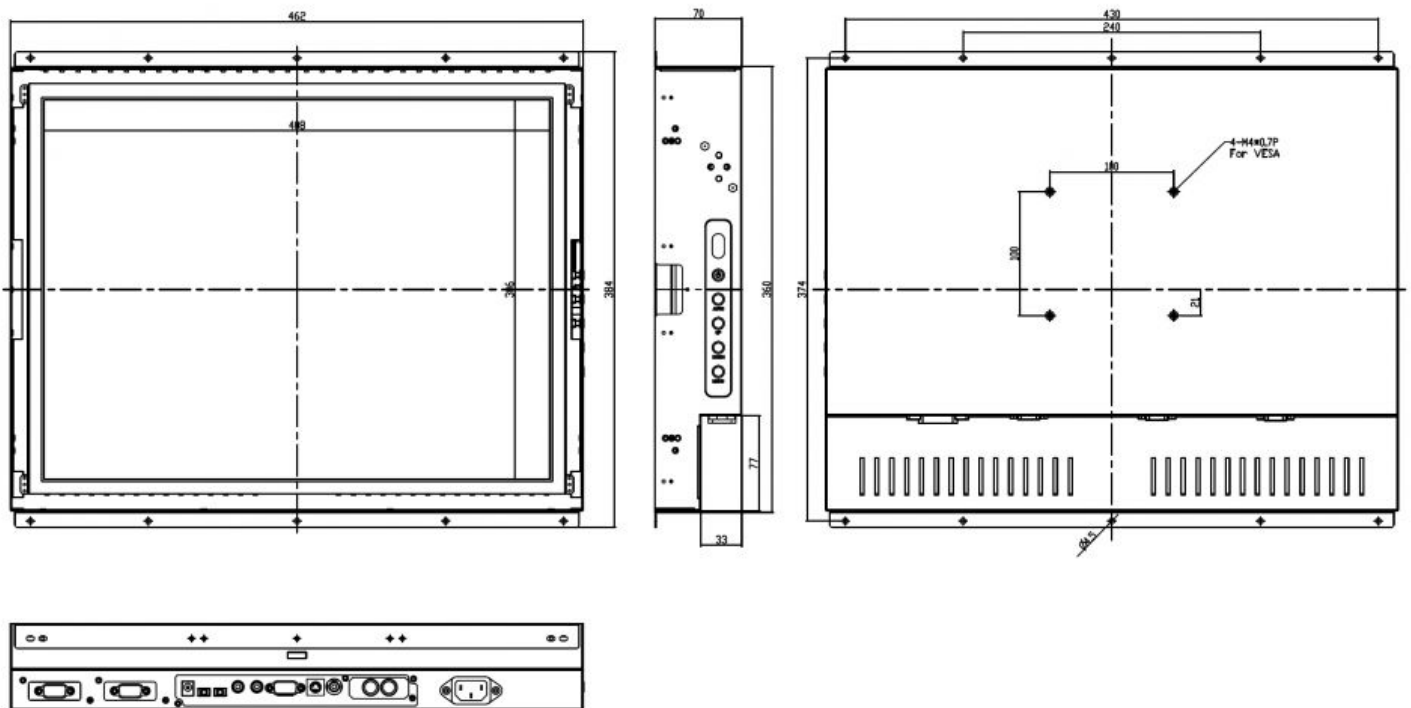

Zubehör

1x DVI

optional 1x DVI

SAW Touch

optional: SAW Touch

RS-232 Remote Control SE98X

optional: RS-232 Remote Control, only for SE98X

RS-232 Remote Control F2482

optional: RS-232 Remote Control, only for F2482

Resistiver Touch / Resestive Touch

optional: Resistiver Touch / Resestive Touch

OEM Infrarot / Infrared Touch

optional: OEM Infrarot Touch

Networking Digital Signage 720p/1080p

optional: Networking Digital Signage 720p/1080p

Networking Digital Signage 480p

optional: Networking Digital Signage 480p

Motion Sensor

optional: Motion Sensor

Light Sensor

optional: Light Sensor

Kapazitiver Touch / Capacitive Touch (3M)

optional: Kapazitiver Touch / Capacitive Touch (3M)

Kapazitiver Touch / Capacitive Touch

optional: Kapazitiver Touch / Capacitive Touch

Externe / External OSD - Box

optional: Externe OSD - Box

Auflösung / Resolution: max. 720p

optional: Auflösung/Resolution: max. 720p

Anti Reflektion Glas / Anti-Reflection Glas 6mm (Anti-Vandalismus / Anti-Vandalism)

optional: Anti Reflektion Glass 6mm (Anti-Vandalismus)

Anti Reflektion Glas / Anti-Reflection Glas 3mm

optional: Anti Reflektion Glass 3mm

24V DC-IN

optional: 24V DC-IN

1x DVI + 1x HDMI

optional: 1x DVI + 1x HDMI

SAW Touch 6mm Anti-Vandalismus / Anti-Vandalism

optional: SAW Touch 6mm Anti-Vandalismus / Anti-Vandalism
